




Ankraj Tijleri / Anchor Drilling Rods

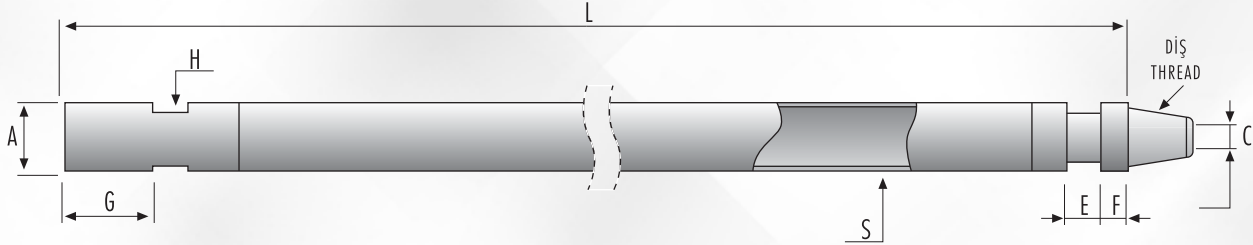

A (mm)	L (mm)	DIŞ THREAD	C (mm)	S (mm)	H (mm)	E (mm)	F (mm)	G (mm)	AĞIRLIK / WEIGHT (kg)			Malzeme Kalitesi Material Quality
									S= 6,3	S= 8	S= 8,8	
76	1000	23/8 AR	40	6,3 - 8	65	40	24	100	15,10	19,2	-	S135 / N80
	1500								20,50	26,0	-	S135 / N80
	2000								25,90	32,9	-	S135 / N80
	3000								36,80	46,7	-	S135 / N80
	4000								47,70	60,6	-	S135 / N80
	5000								58,60	74,4	-	S135 / N80
	6000								69,30	88,0	-	S135 / N80
89	1000	27/8 AR	40	6,3 - 8	65	40	17	106	18,70	23,70	-	S135 / N80
	1500								25,70	32,00	-	S135 / N80
	2000								31,70	40,30	-	S135 / N80
	3000								44,50	56,50	-	S135 / N80
	2500								63,80	81,00	-	S135 / N80
	6000								83,00	105,40	-	S135 / N80
114	1000	31/2 AR	40	6,3 - 8	50	95	18	113	28,30	35,90	39,50	S135 / N80
	1500								37,00	47,00	51,70	S135 / N80
	2000								45,40	57,70	63,40	S135 / N80
	3000								62,20	79,00	86,90	S135 / N80
	4500								86,00	109,20	120,10	S135 / N80
	6000								112,80	143,20	157,60	S135 / N80